



## Mainsail Measurement Form

Boat Type/LOA:	
Owner:	
Phone:	
E-Mail:	
Address:	
Address:	
City:	
State:	Zip Code:


P =	Max Luff: With tape hoisted on main halyard to very top, measure down to top of boom. (We will deduct for stretch.)	
L=	Max Leech: With tape hoisted on main halyard to top, measure to max foot length.  *Make sure boom clears bimini top	
E =	Measure from aft face of mast to max foot if possible (or to black band if provided)	
A =	Aft face of mast to tack pin (cut back)	
B =	Top of boom to tack pin or shackle (cut up)	
C =	Aft face of mast to tack reef hook, if applicable	
D =	Top of boom to top of track opening or track start	
F=	Clew pin to front edge of track car, if applicable	
G =	Clew pin to top of boom, if applicable	
H =	Aft face of mast to aft edge of reef block	
K =	Max foot mark to backstay	

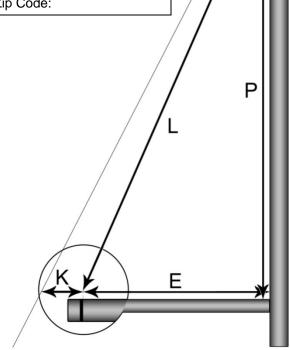

Measure width of sail fitting for mast and boom to nearest 1/16". Circle fitting type and sizes








Mast	Boom
5/16"	5/16"
3/8"	3/8"
7/16"	7/16"
1/2"	1/2"

Internal Slide



Mast	Boom
9/16"	9/16"
11/16"	11/16"
3/4"	3/4"
13/16"	13/16"
7/8"	7/8"

Slug (Euro. Style)



Mast	Boom
1/4"	1/4"
5/16"	5/16"
3/8"	3/8"
7/16"	7/16"
1/2"	1/2"
1/2	1/2

Slug



Mast	Boom
7/16"	7/16"
9/16"	9/16"
5/8"	5/8"

External Slide





Mast	Boom
5/8"	5/8"
7/8"	7/8"
1"	1"